



A




BELLOWS

UNIT



WITH




MANY USES

Dear Sir,
Please find overleaf details of our B.P.M. Bellows Units
These can be supplied with fittings for use a Leica M3 which must
be used with the Visoflex reflex housing. We make several mounts
for use with the lens head part of several Leica lenses.
These units may be obtained from any dealer or in case of difficulty
direct on 10 days approval against cash.

Dear Sir,

B.P.M. UNIVERSAL BELLOWS UNIT AND FOCUSLIDE

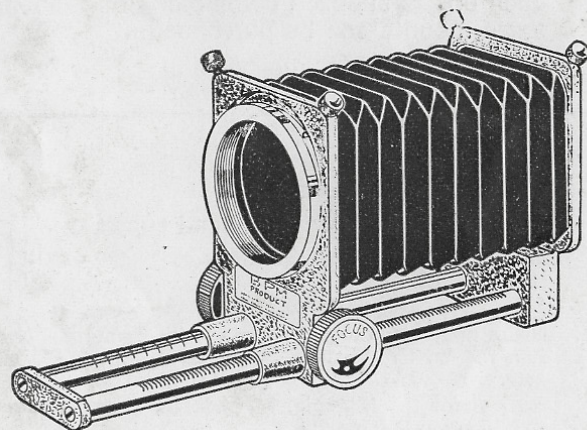

TWO
PRECISION AIDS TO SINGLE
LENS REFLEX PHOTOGRAPHY

MADE IN ENGLAND

B.P.M. UNIVERSAL BELLOWS UNIT

For use with most 35mm. single lens reflex cameras with focal plane shutters and interchangeable lenses.

- ★ **A 3 IN 1 EXTENSION UNIT**
- ★ **PRECISION ULTRA CLOSE-UPS**
- ★ **2"x2" SLIDE REPRODUCTION**
- ★ **TELEPHOTOGRAPHY**

Alloy Interchangeable Lens Mounts with quick precision location. Allows the unit to be used with the pillars in front or reversed back under the Camera.

Each unit is supplied complete with one back and one front mount. Extra mounts can be purchased at any time.

Frame supplied for reproducing 35mm. slides or copying negatives.

Extension Range from 30mm. to 150mm. (1 $\frac{1}{8}$ in. to 6in.)

Two Tripod holes for balanced support.

One basic unit can be used on any of the following cameras with the use of our interchangeable lens mounts.

Bayonet fittings available: Firstflex, Exakta, Exa, Praktina, Petriflex, Nikon F, Nikkormat, Nikkorex F, Nikon with Photomic Head, Minolta, Singlex, Alpa, Pen F, Pen FT, Yashica Pentamatic, Topcon R.E., Plusflex, Leicaflex, Leica M series, Argus, Canonflex, Konica Autoreflex T, Icarex.

Special for the Miranda, Miranda Sensorex 1 screw fitting, 1 Bayonet mount.

Screw fittings available: Edixa, Praktica, Pentax, Yashica J3, Zenith, Contax D, Wrayflex, Asahiflex, Leica screw. Periflex "C" & "D" Cine Lens Mounts.

LEITZ LENS HEADS Thread sizes:- 28.5mm., 33mm., 39mm., 43mm., 46mm.
REVERSING RING MOUNTS Designed for using lenses inverted for optimum definition on extreme close-up work. Available in 46mm., 48mm., 49mm., 52mm., 55mm. filter mount sizes.

IT IS IMPORTANT TO STATE MAKE AND MODEL OF CAMERA WHEN ORDERING.

If you change your camera this unit is **not redundant**. Just change the mounts to the new type fitting.

TELEPHOTOGRAPHY. Extra mounts can be made to suit non-standard lenses. This will allow lenses from old film or plate cameras to be used as long focus lenses. Any 3in. to 6in. lens without any means of focussing is suitable. The bellows becomes a focussing mount. Telephoto magnification can be found by dividing standard lens into focal length of long focus lens.



Blank mounts can be supplied for customers own fitting, or we can machine mounts to suit most special lenses.

Twin focussing pillars with rack and pinion movement.

Rigid lock.

Scale for calculating exposures.

Full instructions with each unit.

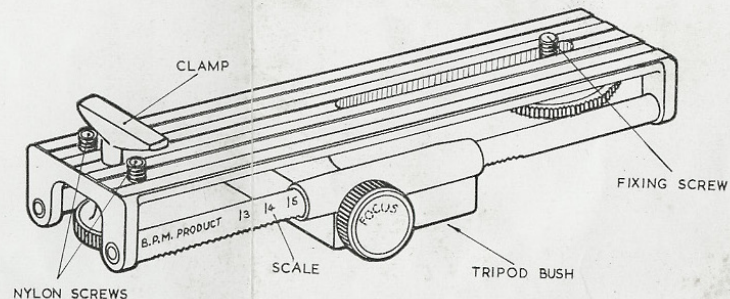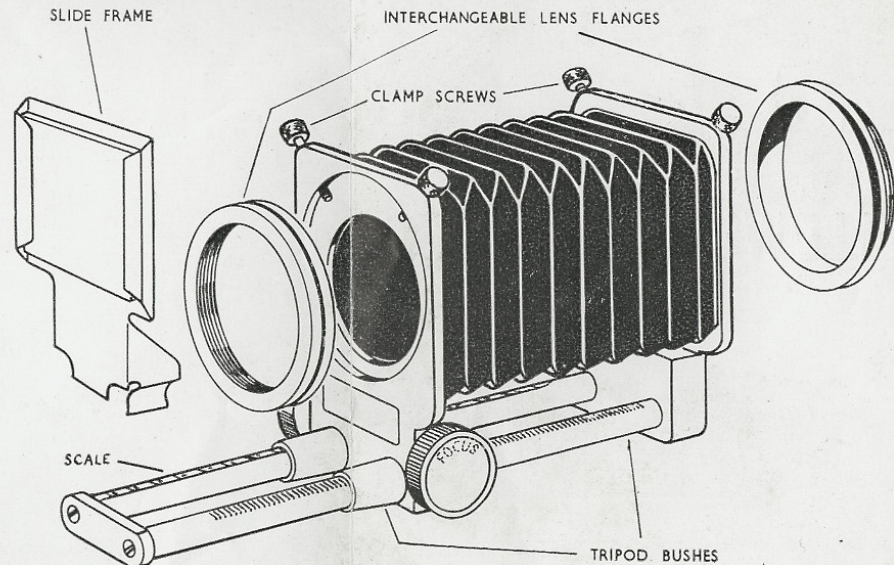

B.P.M. FOCUSLIDE

An auxiliary slide to enable bellows unit with camera attached to be accurately and quickly focussed. Designed for use on any S.L.R. camera with any bellows unit or extension tubes. Invaluable for macro-focus cine-cameras. 4 $\frac{1}{2}$ ins. of travel. Rack and pinion focus. Clamp for secure fixing of bellows unit. Solid lock.