



A




BELLOWS




UNIT

WITH



MANY USES

B.P.M. UNIVERSAL BELLOWS UNIT

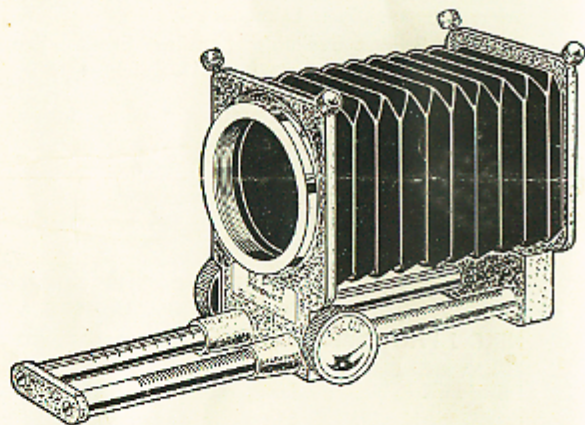

**PRECISION AID TO SINGLE
LENS REFLEX PHOTOGRAPHY**

B.P.M. UNIVERSAL BELLOWS UNIT

For use with most 35mm. single lens reflex cameras with focal plane shutters and interchangeable lenses.

★ A 3 IN 1 EXTENSION UNIT

Anodised Alloy Interchangeable Lens Mounts with quick precision location.

Allows the unit to be used with the pillars in front or reversed back under the Camera.

One basic unit can be used on any of the following cameras with the use of our interchangeable lens mounts.

Screw fittings available: Edixa, Praktica, Pentax, Yashica J3, Zenith, Contax D, Wrayflex, Asahiflex, Leica screw.

Bayonet fittings available: Firstflex, Exakta, Exa, Praktina, Petriflex, Nikon F, Nikkormat, Nikkorex F, Minolta, Singlex, Leica M series, Argus, Canonflex, Alpa, Pen F, Yashica Pentamatic, Topcon R.E., Plusflex, Leicaflex.

Special for the Miranda camera, 1 screw fitting, 1 Bayonet mount.

Other mounts for new model cameras will be added from time to time.

Each unit is supplied complete with one back and one front mount. Extra mounts can be purchased at any time.

If you change your camera this unit is **not redundant**. Just change the mounts to the new type fitting.


SPECIAL MOUNTS CAN BE SUPPLIED TO SUIT THE FOLLOWING CAMERAS & LENSES

NIKON PHOTOMIC	Long male bayonet mount to clear meter head.
LEICA SCREW & PERIFLEX	Long rear mount to clear operating dials.
DOMIPLAN LENS	Mount is designed to allow correct operation of manual iris when used on front of bellows.
'C' & 'D' CINE MOUNTS	Available in male and female fittings.
LEITZ LENS HEADS	Mounts available for all popular lenses.
REVERSING RING MOUNTS	Designed for using lenses inverted for optimum definition on extreme close-up work. Available in 46mm., 49mm. and 52mm. filter mount sizes.

Blank mounts can be supplied for customers own fitting, or we can machine to suit any special lenses.

Please state make of camera and lens when ordering.

- ★ **PRECISION ULTRA CLOSE-UPS**
- ★ **2"x2" SLIDE REPRODUCTION**
- ★ **TELEPHOTOGRAPHY**

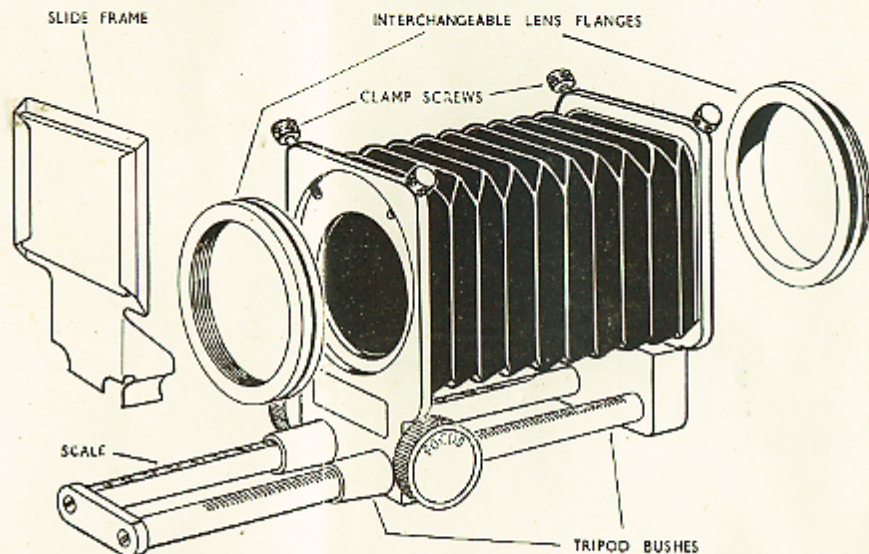

TELEPHOTOGRAPHY. Extra mounts can be made to suit non-standard lenses. This will allow lenses from old film or plate cameras to be used as long focus lenses. Any 3in. to 6in. lens without any means of focussing is suitable. The bellows becomes a focussing mount. Telephoto magnification can be found by dividing standard lens into focal length of long focus lens.

Frame supplied for reproducing 35mm. slides or copying negatives.

Extension Range from 30mm. to 150mm. (1 $\frac{1}{8}$ in. to 6in.).

Twin focussing pillars with rack and pinion movement. Rigid lock.

Scale for calculating exposures. Full instructions with each unit.

TWO TRIPOD HOLES FOR BALANCED SUPPORT

BUTTERFIELD PHOTOGRAPHIC MFG. CO., NORWAY ST., PORTSLADE, SUSSEX